
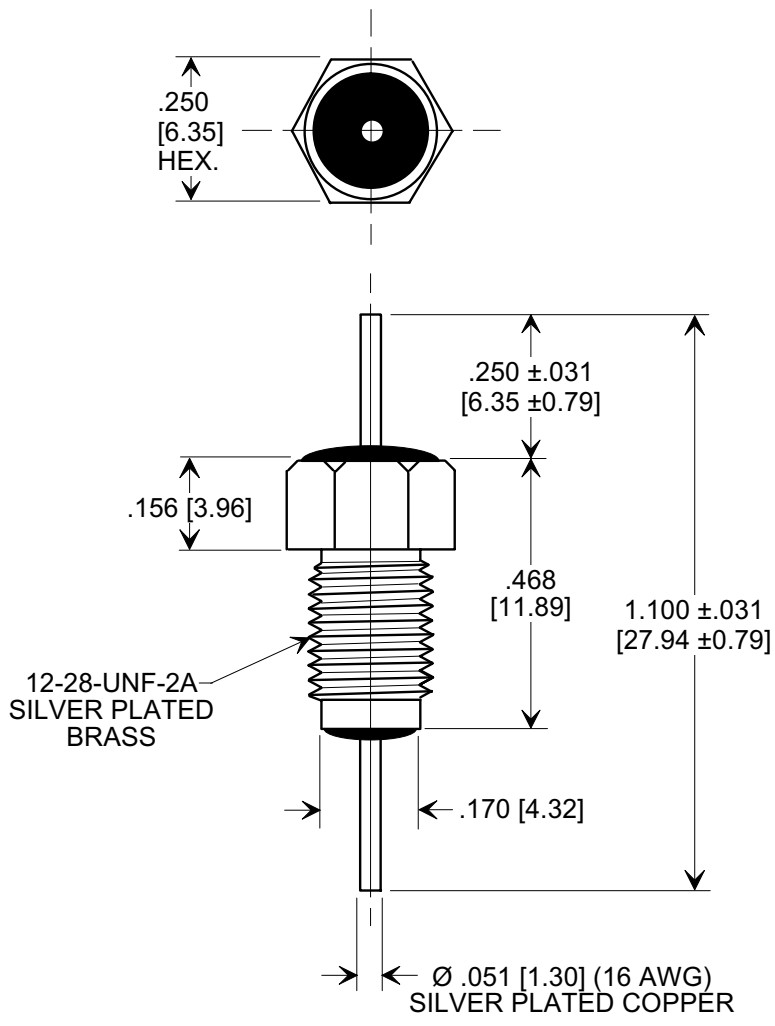



This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []



SPECIFICATIONS	
TUSONIX STYLE.	2499-538
Capacitance Value:	100 pF
Capacitance Tolerance:	+20%
Temp. Characteristics:	X5S
Rating:	500 WVDC @ 85 °C
Current (A):	20
IR Min @ 100 vdc	10 GΩ
DWV	1500 VDC
Operating Range:	-55° TO + 85°C

- NOTES:
- TUSONIX STANDARD RESERVED PART NUMBER: 2499-538-X5S0-101M.
TUSONIX RoHS COMPLIANT RESERVED PART NUMBER: 2499-538-X5S0-101M LF.
CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
 - PART MARKING: TRADEMARK, CAPACITANCE CODE AND TOLERANCE CODE STAMPED ON BUSHING HEX FLATS:
STANDARD PART: BLACK MARKING.
RoHS COMPLIANT PART: GREEN MARKING.

X-2015 Rev-0	REVISION RECORD	Original Release	0	WAS SK 8188-739. S.M. 08-09-06 20060807-2-03	--TOLERANCES-- Unless Otherwise Specified	Title BUSHING TYPE FEED-THRU CAPACITOR		
		C.O.				DECIMAL ± .015 [0.38]	Drawn S.M. 07-10-06	Scale 3X
		WAS SK 8188-739. S.M. 08-09-06				ANGLES ±	Approved T.C. 07-10-06	
		20060807-2-03				TUSONIX TUCSON, ARIZONA	A	2499-538-X5S0-101M